

Spectra PowerBox 3200A-Series

Technical Data



Features

- Pre-defined Box-PC
- Intel® Core™ i3/i5 Kaby Lake CPU
- 1 x PCIe(x16), 1 PCIe(x1), 3 x mPCIe
- 6 x USB 3.2 Gen 1, 2 x USB 2.0
- 2 x GLAN, 2 x COM, 2 x DP, 1 x DVI-I
- Windows® 10 IoT Enterprise

Model	Spectra PowerBox 32A Advanced 1	Spectra PowerBox 32A Advanced 1 Wide Temp	Spectra PowerBox 32A Advanced 2	Spectra PowerBox 32A Advanced 2 Wide Temp
Article n°	167204	167205	167207	167208

System Configuration

CPU	Intel® Core™ i3-7100T 4 Cores / 4 Threads / Base Freq. 3.40 GHz		Intel® Core™ i5-7500T 4 Cores / 4 Threads / Base Freq. 2.70 GHz / Burst Freq. 3.30 GHz	
RAM	8 GB	8 GB WT	8 GB	8 GB WT
SSD	256 GB 2.5" SATA-6G	256 GB 2.5" SATA-6G WT	256 GB 2.5" SATA-6G	256 GB 2.5" SATA-6G WT
Operating System	Microsoft® Windows® 10 IoT Enterprise 2021 LTSC, 64-bit, german / english			
Operating Temperature	0°C ~ +40°C	-40°C ~ +50°C	0°C ~ +40°C	-40°C ~ +50°C

Controllers & Interfaces

Ethernet	1 x Intel® i210 Gigabit-LAN, 1 x Intel® i219 Gigabit-LAN			
Graphics	integrated in CPU			
Audio	Realtek ALC888-GR			
Front IOs	2 x USB 3.2 Gen 1 1 x DP (3840 x 2160 FHD/4K)			
Rear IOs	4 x USB 3.2 Gen 1, 2 x USB 2.0 2 x RJ45 2 x RS-232/422/485 1 x DP (3840 x 2160 FHD/4K), 1 x DVI-I (1920 x 1080 FHD) 1 x Line-out, 1 x Mic-in, 1 x PS/2			

Drives & Expansions


Storage	1 x 2,5" SATA HDD/SSD (Hot-Swap, RAID 0/1 Support), 3 x mSATA (mPCIe Slot), 1 x SIM			
PCI/PCIe Slots	1 x PCIe(x16), 1 x PCIe(x1)			
mPCIe Slots	3 x Full-Size for WiFi / GSM or expansion cards			
Antenna Holes	2 x for wireless communication			

Further Data


Power	AT/ATX 9~48 V DC			
Dimensions (W x H x D)	227 x 128 x 261 mm			
Weight (net/gross)	6,0 kg / 8,4 kg			
Mounting	Wall			
Warranty	24 months			
Packing List	1 x Power Terminal Block (female), 1 x Remote Power Terminal Block, 1 x Fan Terminal Block, 1 x Driver/Manual Medium, 1 x Microsoft® Windows® Recovery Medium, 2 x rails for Wall mount, 1 x DVI to VGA Adapter			

Spectra PowerBox 3200A-Series

Interfaces

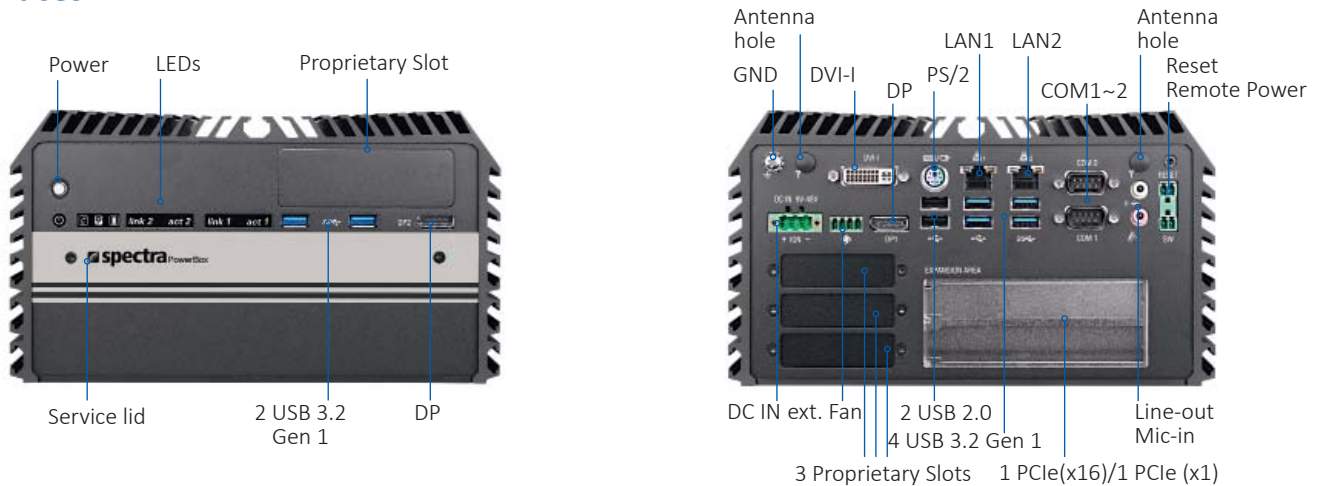

Details Service lid

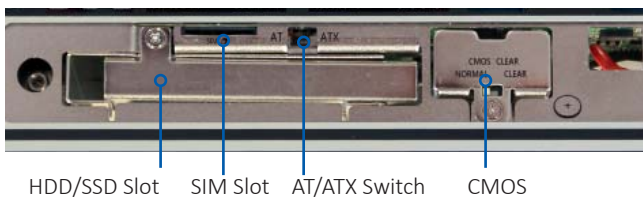

Further options - Ask us!

Interfaces for the proprietary slot

- 4 x Gigabit-LAN, RJ45
- 4 x Gigabit-LAN, M12
- 4 x Gigabit-LAN, XM12
- 2 x Gigabit-LAN
- 2 x RS-232
- 2 x USB 3.2 Gen 1



Further functions

- Power ignition
- PoE

PCI/PCIe Riser card alternative

- 2 x PCIe(x8)
- 1 x PCI + 1 x PCIe(x16)

Power supply

Power adapter, 120W, 24V/5A, C14, 3-pin, Tube

Mounting Kits

VESA Holder

All brand, company and product names are registered or otherwise protected works of their respective companies / owners. We reserve the right to change specifications and product description at any time without prior notice (March 2022)